

## Product Highlights

### Surveillance Made Simple

Set up your own surveillance camera complete with remote viewing on your mobile device in just a few minutes and no technical knowledge required

### Sound and Motion Detection

Never miss an important moment with sound and motion detection that can send notifications with snapshots right to your e-mail inbox

### mydlink Cloud Service Enabled Device

Stay connected to everything you love from anywhere, anytime; mydlink service provides peace of mind when you're away from your home or office



## DCS-930L

# Wireless N Network Camera

## Features

### Camera

- High quality VGA CMOS sensor for excellent image quality
- Connects directly to your network

### Security

- Motion detection with configurable detection windows
- Sound level detection
- Send notifications and snapshots to your e-mail address

### Ease Of Use

- Wireless 802.11n/g/b connection lets you install the camera anywhere
- WPS support for easy wireless connection
- UPnP & DDNS support

### mydlink Functionality

- mydlink enabled so you can check on your camera anytime, anywhere
- View and manage your camera through the mydlink website
- Supports the mydlink Lite and mydlink+ apps for remote viewing on your mobile device

The DCS-930L Wireless N Network Camera is a complete surveillance solution for your home or small office. It can connect to your network using Wireless N, so you can place it anywhere in your home, and it even includes motion and sound detection. It's mydlink enabled too, so you can check on your camera anytime, anywhere from any PC, tablet, or mobile phone.

## Keep an Eye on Your Home or Office


The DCS-930L is a standalone surveillance camera that requires no special hardware or software, and can run independently even without a PC. Send e-mail notifications with snapshots whenever motion or sound is detected using just the DCS-930L and an Internet connection. You can customize areas of the video to monitor for motion to keep watch over entryways, and you can set volume limits to detect when a loud sound is picked up by the camera.

## Instant Anywhere Access With mydlink Cloud Service

Enhanced with mydlink™ support, the DCS-930L makes it easier and more convenient for you to look after your family and home or office environment. With a mydlink service enabled camera, you can stay connected to everything you love from anywhere, anytime. Access your camera through the mydlink website or the mydlink mobile app that lets you view and manage your camera through your tablet or mobile phone, no matter where you are.

## Create a Comprehensive Surveillance System

Included with the DCS-930L is the D-ViewCam software, which adds enhanced features and functionality that helps you create a full surveillance system. D-ViewCam enables centralized management of multiple network cameras, supporting up to 32 network cameras and up to 64 users. With a dedicated computer it offers digital monitoring and recording with a wide array of features, including scheduled, motion and manual recording options for individual needs.

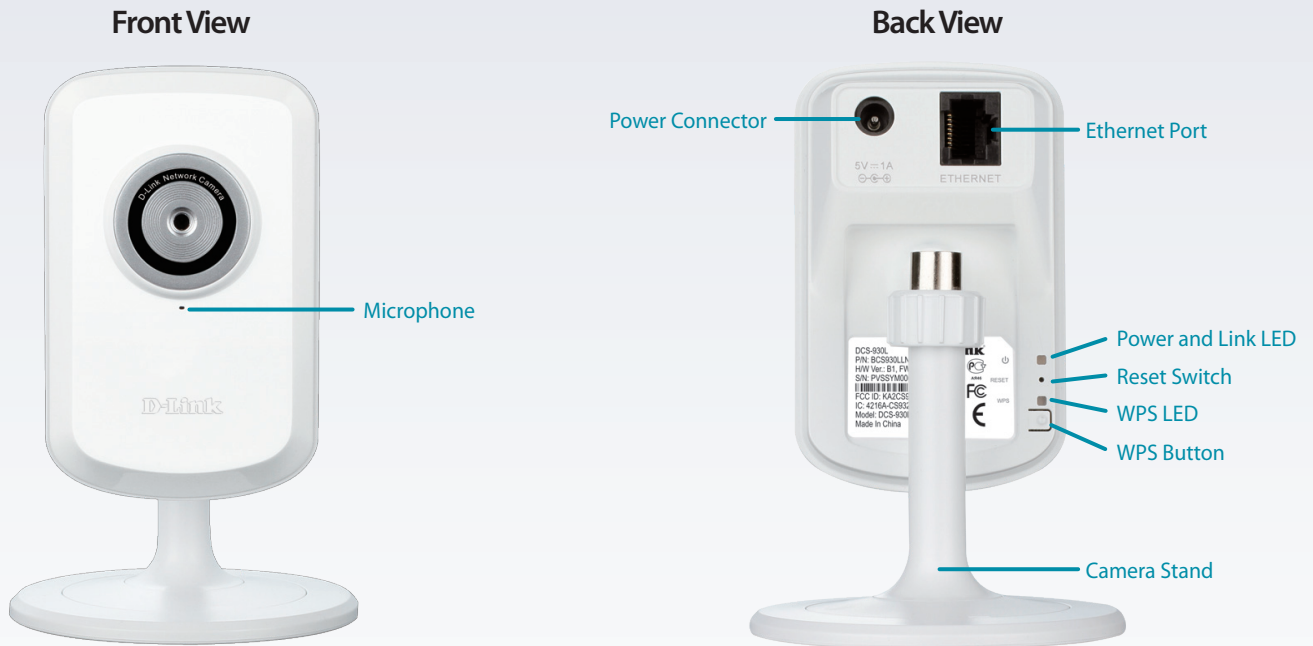

**Technical Specifications**

**Camera**

Camera Hardware Profile	<ul style="list-style-type: none"> <li>• 1/5"VGA progressive CMOS sensor</li> <li>• Fixed length 3.15 mm</li> <li>• Aperture F2.8</li> <li>• Angle of view                             <ul style="list-style-type: none"> <li>• (H) 45.3°</li> <li>• (V) 34.5°</li> <li>• (D) 54.9°</li> </ul> </li> </ul>	<ul style="list-style-type: none"> <li>• Exposure Time: 1/3.75 to 1/14,640 sec.</li> <li>• 4X digital zoom</li> <li>• Minimum illumination: 1 lux</li> <li>• Minimum object distance: 500 mm</li> <li>• Built-in microphone</li> </ul>
Image Features	<ul style="list-style-type: none"> <li>• Configurable image size, quality, and frame rate</li> <li>• Time stamp and text overlays</li> </ul>	<ul style="list-style-type: none"> <li>• Configurable motion detection windows</li> <li>• Configurable brightness, saturation, contrast</li> </ul>
Video Compression	<ul style="list-style-type: none"> <li>• MJPEG format compression</li> </ul>	<ul style="list-style-type: none"> <li>• JPEG for still images</li> </ul>
Video Resolution	<ul style="list-style-type: none"> <li>• 640 x 480 at 20 fps</li> </ul>	<ul style="list-style-type: none"> <li>• 320 x 240 / 160 x 112 at 30 fps</li> </ul>
Audio	<ul style="list-style-type: none"> <li>• PCM</li> </ul>	
Connectivity	<ul style="list-style-type: none"> <li>• 10/100 BASE-TX Ethernet port</li> </ul>	<ul style="list-style-type: none"> <li>• 802.11n/g/b wireless with WEP/WPA/WPA2 encryption</li> </ul>

**Network**

Network Protocols	<ul style="list-style-type: none"> <li>• IPv4</li> <li>• ARP</li> <li>• TCP</li> <li>• UDP</li> <li>• ICMP</li> <li>• DHCP Client</li> <li>• NTP Client (D-Link)</li> <li>• DNS Client</li> </ul>	<ul style="list-style-type: none"> <li>• DDNS Client (D-Link)</li> <li>• SMTP Client</li> <li>• FTP Client</li> <li>• HTTP Server</li> <li>• PPPoE</li> <li>• UPnP Port Forwarding</li> <li>• LLTD</li> </ul>
Security	<ul style="list-style-type: none"> <li>• Password authentication</li> </ul>	<ul style="list-style-type: none"> <li>• HTTP digest encryption</li> </ul>

# DCS-930L Wireless N Network Camera

System Integration	
System Requirements for Web Interfaces	<ul style="list-style-type: none"> <li>Operating system: Microsoft Windows 8/7/Vista or Mac OS X 10.6 or higher</li> <li>Browser: Internet Explorer 7, Firefox 12, Safari 6, or Chrome 20 or higher with Java installed and enabled</li> </ul>
Event Management	<ul style="list-style-type: none"> <li>Motion detection</li> <li>Sound level detection</li> <li>Event notification and sending snapshots via SMTP</li> </ul>
Remote Management	<ul style="list-style-type: none"> <li>Configuration accessible via web browser</li> </ul>
Mobile support	<ul style="list-style-type: none"> <li>mydlink Lite app for iPhone/iPad/iPod touch, Android, and Windows Phone</li> </ul>
D-ViewCam™ System Requirements	<ul style="list-style-type: none"> <li>Operating System: Microsoft Windows 8/7/Vista/XP</li> <li>Web Browser: Internet Explorer 7 or higher</li> </ul>
D-ViewCam™ Software Functions	<ul style="list-style-type: none"> <li>Remote management/control of up to 32 cameras</li> <li>Viewing of up to 32 cameras on one screen</li> <li>Supports all management functions provided in web interface</li> <li>Scheduled motion triggered, or manual recording options</li> </ul>
General	
Dimensions	<ul style="list-style-type: none"> <li>Camera only: 60 x 26 x 96 mm (2.36 x 1.02 x 3.78 in)</li> <li>With base: 80 x 80 x 126.6 mm (3.15 x 3.15 x 4.98 in.)</li> </ul>
Weight	<ul style="list-style-type: none"> <li>Camera only: 46.1 grams (1.63 ounces) ± 5%</li> <li>With base: 80.1 grams (2.83 ounces) ± 5%</li> </ul>
Power	<ul style="list-style-type: none"> <li>5 V DC 1 A, 50/60 Hz</li> </ul>
Power Consumption	<ul style="list-style-type: none"> <li>1.84 watts maximum ± 5%</li> </ul>
Temperature	<ul style="list-style-type: none"> <li>Operating: 0 to 40 °C (32 to 104 °F)</li> <li>Storage: -20 to 70° C (-4 to 158 °F)</li> </ul>
Humidity	<ul style="list-style-type: none"> <li>Operating: 20% to 80% non-condensing</li> <li>Storage: 5% to 95% non-condensing</li> </ul>
Certifications	<ul style="list-style-type: none"> <li>CE</li> <li>FCC Class B</li> <li>IC</li> <li>C-Tick</li> </ul>

Updated 2014/08/26